

# PRODUCT DATASHEET

## TRUSYS FLEX P 35W 840 VW CL WT EM

TruSys® FLEX EMERGENCY VERY WIDE | Luminaire inserts with very wide light distribution for standard and emergency lighting, up to 175 lm/W



### Areas of application

- Emergency illumination of escape routes
- Antipanic lighting
- Buildings requiring up to 3 h emergency light operation
- Direct replacement for luminaires with compact fluorescent lamps
- Industry halls, high rack warehouse, hardware stores
- Discounters, supermarkets

### Product benefits

- Seamless integration of luminaires with emergency lighting function into general lighting
- Easy wiring thanks to included prewired driver and battery for Emergency lighting function
- Simple testing of luminaires with emergency lighting function thanks to integrated automatic test function
- Convenient visualization of results of automatic test with an included control LED
- Operation of integrated emergency lighting function with long life LiFePO4 battery with 3h battery discharge time
- High luminous efficacy in normal operation
- 3 years guarantee
- Very wide light distribution for area lighting
- Easy installation, no tools required for connection
- Energy saving and cost-effective
- Flexible application due to a range of different lumen packages and beam angles

### Product features

- Certified according to European norms (EN 60598-1:2015; EN 60598-2-22:2014)



- Luminaire suitable for normal lighting and emergency lighting
- Self-contained luminaires
- Emergency lighting function: battery discharge time of 3 h
- Function test of emergency lighting: automatic (AT)
- Battery technology: LiFePO<sub>4</sub>
- Beam angle very wide: 120°
- Click into place solution with smart click buttons
- Fixed luminaire taps
- Steel-sheet housing

---


## TECHNICAL DATA

### Electrical data


|                                                             |                       |
|-------------------------------------------------------------|-----------------------|
| Nominal wattage                                             | 35.00 W               |
| Nominal voltage                                             | 220...240 V           |
| Mains frequency                                             | 50...60 Hz            |
| Nominal current                                             | 160 mA                |
| Inrush current                                              | 27.5 A                |
| Inrush current time $T_{h50}$                               | 148 $\mu$ s           |
| Max. number of luminaires per miniature circuit breaker B16 | 22                    |
| Max. number of luminaires per miniature circuit breaker C10 | 17                    |
| Max. number of luminaires per miniature circuit breaker C16 | 27                    |
| Power factor $\lambda$                                      | $\geq 0.95$           |
| Total harmonic distortion                                   | $\leq 15 \%$          |
| Protection class                                            | I                     |
| Operating mode                                              | Integrated LED driver |

### Photometrical data

|                                              |            |
|----------------------------------------------|------------|
| Luminous flux                                | 6000 lm    |
| Luminous efficacy                            | 175 lm/W   |
| Color temperature                            | 4000 K     |
| Light color (designation)                    | Cool White |
| Color rendering index Ra                     | $\geq 80$  |
| Standard deviation of color matching         | 3 sdcm     |
| Low flicker                                  | Yes        |
| Photobiological safety group acc. to EN62778 | RG1        |
| Beam angle                                   | 120 °      |

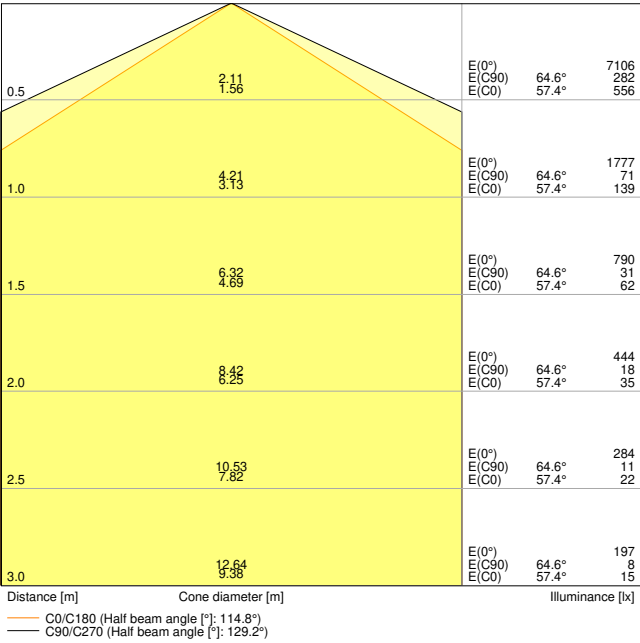

TRUSYS FLEX P 35W 840 VW CL WT EM

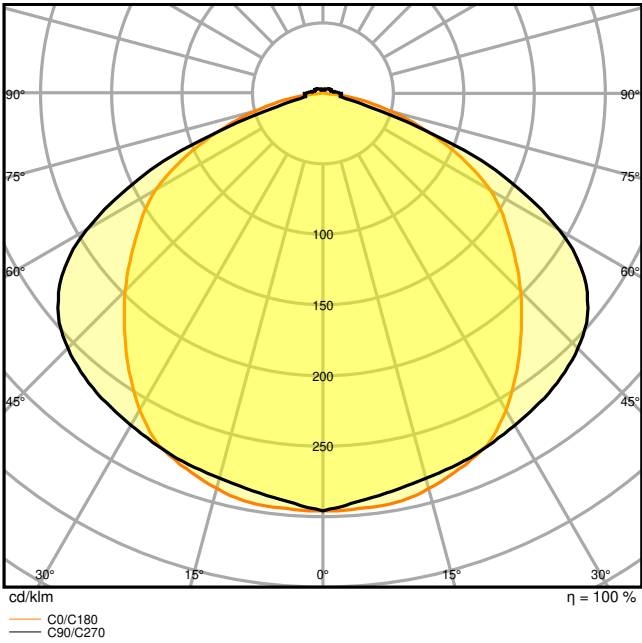

TRUSYS FLEX P 35W 840 VW CL WT EM

Dimensions & Weight

|                |            |
|----------------|------------|
| Length         | 1500.00 mm |
| Width          | 77.70 mm   |
| Height         | 39.40 mm   |
| Product weight | 2360.00 g  |



TRUSYS FLEX luminaire - clear

Materials & Colors

|                                            |                               |
|--------------------------------------------|-------------------------------|
| Product color                              | White                         |
| Housing color                              | White                         |
| RAL Color (most similar)                   | RAL 9016                      |
| Body material                              | Steel                         |
| Cover material                             | Polymethylmethacrylate (PMMA) |
| Light emitting surface material            | Polymethylmethacrylate (PMMA) |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C                        |
| Mercury content                            | 0.0 mg                        |

### Application & Mounting

|                                        |                    |
|----------------------------------------|--------------------|
| Ambient temperature range              | 0...+40 °C         |
| Temperature range at storage           | -40...+80 °C       |
| Type of connection                     | Plug-In connection |
| Type of protection                     | IP40               |
| Protection class IK (shock resistance) | IK04               |
| Dimmable                               | No                 |
| Mounting type                          | Suspended/Surface  |
| Mounting location                      | Mounting rail      |
| Application environment                | Indoor             |
| Adjustable                             | No                 |
| With light source                      | Yes                |
| Replaceable light source               | No                 |

### Lifespan

|                            |                        |
|----------------------------|------------------------|
| Lifespan L70/B50 at 25 °C  | 100000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 76000 h <sup>1)</sup>  |
| Lifespan L80/B50 at 25 °C  | 89000 h                |
| Lifespan L90/B10 at 25 °C  | 38000 h                |
| Number of switching cycles | 100000                 |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

|                             |        |
|-----------------------------|--------|
| Output current              | 430 mA |
| ECG - Output ripple current | < 5 %  |

### BATTERY

|                             |          |
|-----------------------------|----------|
| Type of Battery             | LiFePO4  |
| Battery size [GMS]          | Others   |
| Nominal voltage of battery  | 3.2 V    |
| Nominal capacity of battery | 9000 mAh |
| Battery charging time       | 24 h     |

### Emergency lighting

|                                            |                                                                   |
|--------------------------------------------|-------------------------------------------------------------------|
| Type of Emergency Lighting (EL)            | EL unit (battery and controller) for decentral operation included |
| Area of emergency application              | Anti-panic lighting / Escape route lighting                       |
| Type of emergency light operation          | Non-maintained / Maintained                                       |
| Type of emergency operation test           | Automatic                                                         |
| Wattage in maintained operation mode       | 35.0 W                                                            |
| Wattage in emergency operation mode        | 4 W                                                               |
| Luminous flux in maintained operation mode | 6000 lm                                                           |
| Luminous flux in emergency operation mode  | 740 lm                                                            |
| Battery life in emergency operation mode   | 3 h                                                               |

### Certificates & Standards

|                                                      |                             |
|------------------------------------------------------|-----------------------------|
| Standards                                            | CE / CB / UKCA / ENEC / EAC |
| Luminaire with limited surface temperature, "D sign" | Yes                         |
| Ball shot safe                                       | No                          |
| Replaceable light source (EPREL)                     | Not replaceable             |

### EQUIPMENT / ACCESSORIES

- Mounting rail with fixed integrated 8-pole cable

### DOWNLOAD DATA

| Documents and certificates                                                         |                                        | Document name                      |
|------------------------------------------------------------------------------------|----------------------------------------|------------------------------------|
|  | User instruction / safety instructions | TRUSYS FLEX EMERGENCY 840          |
|  | Legal information                      | Light Source Insert Trusys Flex EM |
|  | Legal information                      | Legal insert TRUSYS FLEX P EM      |

| Documents and certificates                                                          |                                     | Document name                                          |
|-------------------------------------------------------------------------------------|-------------------------------------|--------------------------------------------------------|
|    | Legal information                   | Informationstext 18 Abs 4 ElektroG                     |
|    | Declarations of conformity          | CE Declaration Trusys Flex P EM                        |
|    | Declarations of conformity UKCA     | UKCA Declaration Trusys Flex P EM                      |
|    | Certificates                        | ENEC TRUSYS FLEX P EM                                  |
| Photometric and lighting design files                                               |                                     | Document name                                          |
|    | IES file (IES)                      | TRUSYS FLEX P 35W 840 VW CL WT EM                      |
|    | LDT file (Eulumdat)                 | TRUSYS FLEX P 35W 840 VW CL WT EM                      |
|    | ULD file (DIALux)                   | TRUSYS FLEX P 35W 840                                  |
|   | ROLF file (RELUX)                   | TRUSYS FLEX P 35W                                      |
|  | UGR file (UGR table)                | TRUSYS FLEX P 35W 840 VW CL WT EM                      |
|  | Light distribution curve type cone  | TRUSYS FLEX P 35W 840 VW CL WT EM                      |
|  | Light distribution curve type polar | TRUSYS FLEX P 35W 840 VW CL WT EM                      |
| CAD/BIM files                                                                       |                                     | Document name                                          |
|  | BIM Revit 3D                        | TRUSYS FLEX                                            |
|  | CAD STEP 3D                         | TruSys FLEX                                            |
| Tender texts                                                                        |                                     | Document name                                          |
|  | Tender documents                    | TruSys FLEX EMERGENCY VERY WIDE 35W 840 VW CL WT EM-EN |


LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume    |
|---------------|------------------------------|--------------------------------------|--------------|-----------|
| 4058075772878 | Folding box<br>1             | 108 mm x 1,534 mm x 102 mm           | 2535.00 g    | 16.90 dm³ |

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075772885 | Shipping box<br>4            | 1,547 mm x 218 mm x 231 mm           | 10933.00 g   | 77.90 dm <sup>3</sup> |



The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## ADDITIONAL CATALOG INFORMATION

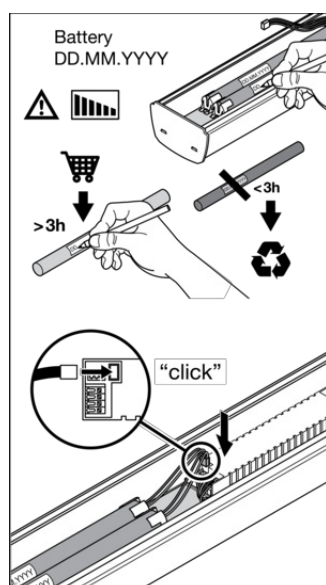

| Luminaire Status         | Control LED                                 |
|--------------------------|---------------------------------------------|
| Normal                   | Green (●)                                   |
| Emergency                | OFF (●)                                     |
| Testing                  | Green: (●) (●) (●) (●) (●) (1s, 1s, 1s ...) |
| Battery connection fault | Red: (●) (●) (●) (●) (1s, 1s, 1s ...)       |
| Battery capacity fault   | Red: (●)                                    |
| Luminaire fault          | Red: (●) (●) (●) (4s, 4s, 4s ...)           |

| Test                                          |                                    |
|-----------------------------------------------|------------------------------------|
| Initialization                                | ≥ 48h Normal Automatic             |
| Daily check of Control LED                    | Green (●)                          |
| Monthly/Weekly functional test (EN 50172) 30s | Automatic test once every 7 days   |
| Yearly duration test (EN 50172) 10h           | Automatic test once every 12 weeks |



## References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.