

PRODUCT DATASHEET

LISOEV 1465x31 28 23W 930 S130

LINEAR INDIVIDUAL LIGHT SOURCES INDIRECT | Upgrade or replacement light source unit for indirect, diffuse light distribution



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Easy installation, no tools required for connection
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90

Product features

- Indirect, diffuse light distribution
- Lifetime (L80/B10): 70,000 h (at 25 °C)
- Beam angle: 90°


TECHNICAL DATA

Electrical data


Nominal wattage	23.00 W
Nominal voltage	45 V
Nominal current	466.000 mA

Photometrical data

Luminous flux	2850 lm
Luminous efficacy	123 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥90
Standard deviation of color matching	3 sdcn
Flickering metric (Pst LM)	≤1
Stroboscope effect metric (SVM)	≤0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	130 °
UGR	19

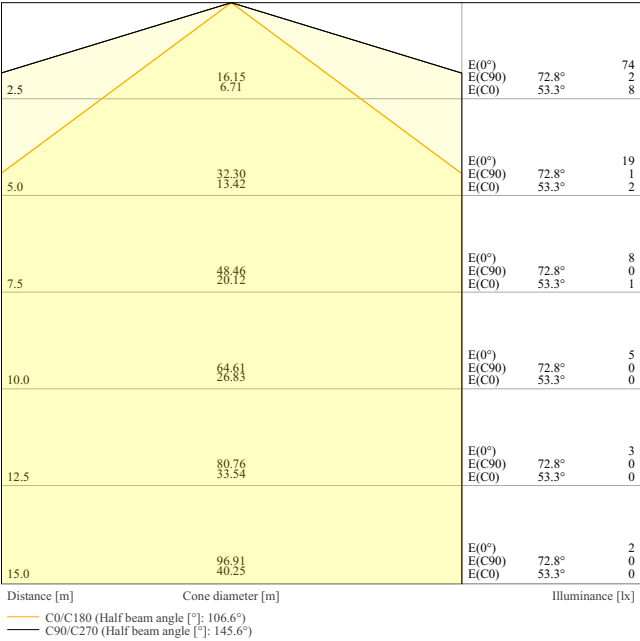

LISOEV 1465X31 28 23W 930 S130 LEDV 466mA

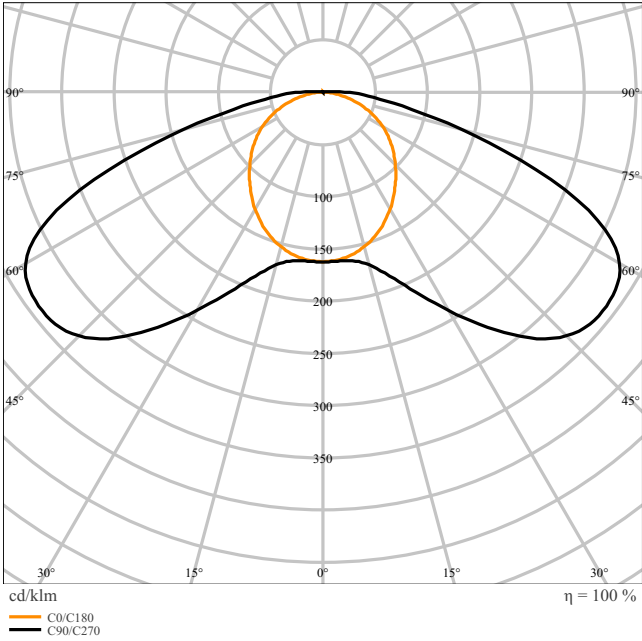

LISOEV 1465X31 28 23W 930 S130 LEDV 466mA

Dimensions & Weight

Length	1465.00 mm
--------	------------

Width	31.00 mm
Height	11.00 mm
Product weight	337.00 g
Cable length	100.000



1 5m INDIRECT LED MODULE

Materials & Colors

Product color	Grey
Housing color	Grey

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Push-in clamp
Type of protection	IP20
Dimmable	No

Lifespan

Lifespan L70/B50 at 25 °C	100000 h
Lifespan L80/B10 at 25 °C	70000 h
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
-----------	---------------------------------------

Additional product data

Product remark	Available from September 2025
----------------	-------------------------------

Safety advice

– All electrical connections must be made by a qualified person.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	User instruction G11244437
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11218810
	Legal information	Legal Insert G11244392
	Legal information	LSI insert G11244301
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV
Photometric and lighting design files		Document name
	IES file (IES)	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
	LDT file (Eulumdat)	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
	Light distribution curve type cone	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
	Light distribution curve type polar	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
CAD/BIM files		Document name
	CAD STEP 3D	LN INDV INDIRECT G2 LISOEV 1500

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854285059	Folding box 1	36 mm x 1,472 mm x 17 mm	417.00 g	0.90 dm ³
4099854285066	Shipping box 10	1,484 mm x 184 mm x 67 mm	4270.00 g	18.29 dm ³
4099854285073	Shipping box 20	1,504 mm x 204 mm x 158 mm	9450.00 g	48.48 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DIRECT		ROBERT	
EAN	LSDEV	EAN	LSDEV
		EAN	LINEAR Index/EPWT
		40005610210	1000 1400 400 PLS WT
		40005610220	1000 1400 400 PLS WT
		40005610230	1000 1400 400 CAH WT
		40005610240	1000 1400 400 CAH WT
40005610250	LSDEV 101020 48 100 400 100 1020 10	40005610260	1000 1400 400 CAH WT
		40005610270	1000 1400 400 CAH WT
		40005610280	1000 1400 400 CAH WT
		40005610290	1000 1400 400 CAH WT
		40005610300	1000 1400 400 CAH WT
		40005610310	1000 1400 400 CAH WT
		40005610320	1000 1400 400 CAH WT
		40005610330	1000 1400 400 CAH WT
		40005610340	1000 1400 400 CAH WT
		40005610350	1000 1400 400 CAH WT
		40005610360	1000 1400 400 CAH WT
		40005610370	1000 1400 400 CAH WT
		40005610380	1000 1400 400 CAH WT
		40005610390	1000 1400 400 CAH WT
		40005610400	1000 1400 400 CAH WT
		40005610410	1000 1400 400 CAH WT
		40005610420	1000 1400 400 CAH WT
		40005610430	1000 1400 400 CAH WT
		40005610440	1000 1400 400 CAH WT
		40005610450	1000 1400 400 CAH WT
		40005610460	1000 1400 400 CAH WT
		40005610470	1000 1400 400 CAH WT
		40005610480	1000 1400 400 CAH WT
		40005610490	1000 1400 400 CAH WT
		40005610500	1000 1400 400 CAH WT
		40005610510	1000 1400 400 CAH WT
		40005610520	1000 1400 400 CAH WT
		40005610530	1000 1400 400 CAH WT
		40005610540	1000 1400 400 CAH WT
		40005610550	1000 1400 400 CAH WT
		40005610560	1000 1400 400 CAH WT
		40005610570	1000 1400 400 CAH WT
		40005610580	1000 1400 400 CAH WT
		40005610590	1000 1400 400 CAH WT
		40005610600	1000 1400 400 CAH WT
		40005610610	1000 1400 400 CAH WT
		40005610620	1000 1400 400 CAH WT
		40005610630	1000 1400 400 CAH WT
		40005610640	1000 1400 400 CAH WT
		40005610650	1000 1400 400 CAH WT
		40005610660	1000 1400 400 CAH WT
		40005610670	1000 1400 400 CAH WT
		40005610680	1000 1400 400 CAH WT
		40005610690	1000 1400 400 CAH WT
		40005610700	1000 1400 400 CAH WT
		40005610710	1000 1400 400 CAH WT
		40005610720	1000 1400 400 CAH WT
		40005610730	1000 1400 400 CAH WT
		40005610740	1000 1400 400 CAH WT
		40005610750	1000 1400 400 CAH WT
		40005610760	1000 1400 400 CAH WT
		40005610770	1000 1400 400 CAH WT
		40005610780	1000 1400 400 CAH WT
		40005610790	1000 1400 400 CAH WT
		40005610800	1000 1400 400 CAH WT
		40005610810	1000 1400 400 CAH WT
		40005610820	1000 1400 400 CAH WT
		40005610830	1000 1400 400 CAH WT
		40005610840	1000 1400 400 CAH WT
		40005610850	1000 1400 400 CAH WT
		40005610860	1000 1400 400 CAH WT
		40005610870	1000 1400 400 CAH WT
		40005610880	1000 1400 400 CAH WT
		40005610890	1000 1400 400 CAH WT
		40005610900	1000 1400 400 CAH WT
		40005610910	1000 1400 400 CAH WT
		40005610920	1000 1400 400 CAH WT
		40005610930	1000 1400 400 CAH WT
		40005610940	1000 1400 400 CAH WT
		40005610950	1000 1400 400 CAH WT
		40005610960	1000 1400 400 CAH WT
		40005610970	1000 1400 400 CAH WT
		40005610980	1000 1400 4

[illegible]

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.