

PRODUCT DATASHEET

SPOT FP FIX DIM 8 W 3000 K IP65/IP20 SI

SPOT FIREPROOF DIM | Recessed mounted spotlight, round shape, fire-resistant, dimmable



PERFOR-
MANCE
CLASS

Areas of application

- Replacement of halogen lamp spotlights
- Hotel rooms
- Bars, restaurants
- Bathrooms
- Accent lighting
- Galleries, museums
- General illumination

Product benefits

- High luminous efficacy
- Design matches the LEDVANCE DOWNLIGHT luminaire family
- Energy savings of up to 90 % compared to halogen lamp spotlights
- Functional and minimalistic design
- Easy installation with fast connection
- External driver for extended flexibility (compatible with selected dim. drivers)
- Designed for extra IP protection
- 5 years guarantee

Product features

- Fire-resistant (up to 90 minutes, tested in accordance with EN 1365-2:2014 'fire resistance tests for loadbearing elements - Part 2: Floors and roofs')



- Outdoor use and fire-resistant (up to 90 minutes, BS476-20:1987 and BS476-21:1987)
- Compatible with standard ceiling cutouts of 68 mm
- Initial color consistency: ≤ 4 SDCM
- Type of protection, front side: IP65

TECHNICAL DATA

Electrical data

Nominal wattage	8.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	170 mA
Max. number of luminaires per miniature circuit breaker B16	200
Max. number of luminaires per miniature circuit breaker C10	100
Max. number of luminaires per miniature circuit breaker C16	200
Power factor λ	> 0.90
Total harmonic distortion	20 %
Protection class	II
Operating mode	Electronic control gear (ECG)


Photometrical data

Luminous flux	620 lm
Luminous efficacy	75 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	≤4 sdcn
Luminous intensity	-
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	36 °



Technical drawing of the 1000mAh battery pack. The top view shows a circular battery with a diameter of 81mm. The side view shows the battery's profile with a total length of 300mm, a width of 68mm, and a height of 51mm. The battery is connected to a USB cable with a length of 114mm and a USB connector with a height of 27mm.

LEDVANCE Spot Fire-Proof LED fix 8W DIM 8W mn

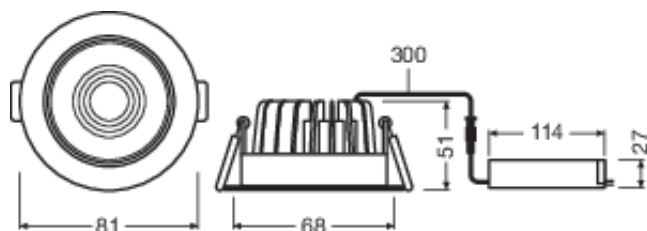

Spot FP LED DIM 8W mn k

Materials & Colors

November 29, 2025, 00:19:40
SPOT FP FIX DIM 8 W 3000 K IP65/IP20 SI

Light emitting surface material	PMMA
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+45 °C
Type of connection	Screw terminal, 2-Pole (L,N)
Type of protection	IP65/IP20
Protection class IK (shock resistance)	IK06
Dimmable	Yes
Type of dimming	LEA/TR.EDG
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting diameter	68 mm
Mounting depth	90 mm
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	50000 h ¹⁾
Lifespan L80/B10 at 25 °C	40000 h ¹⁾
Lifespan L80/B50 at 25 °C	40000 h
Lifespan L90/B10 at 25 °C	20000 h
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

ECG - Length	120 mm
ECG - Height	35 mm

Certificates & Standards

Standards	CE / CB / TÜV SÜD / EAC / RoHS
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No

Safety advice

- Coordination with your responsible fire safety inspector is required in advance
- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- The luminaires are not suitable for covering with thermally insulated material.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	User Instruction Spot LED DIM
	On-Pack-Info	Legal Insert Spot LED
	Legal information	LSI SPOTFP LED FIX AND SPOT LED FIX
	Declarations of conformity	Attestation-of-Conformity-Spot LED -Fix DIM +Downlight LED 35W TÜV
	Declarations of conformity	CE Declaration_Spot FP LED fix_Spot LED fix
	Declarations of conformity UKCA	SPOTFP LED FIX 8W DIM
Photometric and lighting design files		Document name
	IES file (IES)	SpotFP LED fix 8W 3000K SI DIM IP65
	LDT file (Eulumdat)	SpotFP LED fix 8W 3000K SI DIM IP65
	ULD file (DIALux)	SPOTFIREPROOFDIM8W3000KIP65SI
	ROLF file (RELUX)	SPOT FP FIX DIM 8W 3000K
	Light distribution curve type cone	4058075811218 SpotFP LED fix 8W 3000K SI DIM IP65
	Light distribution curve type polar	4058075811218 SpotFP LED fix 8W 3000K SI DIM IP65


LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075127371	Folding box 1	142 mm x 102 mm x 112 mm	355.00 g	1.62 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075127388	Shipping box 27	440 mm x 320 mm x 360 mm	10110.00 g	50.69 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

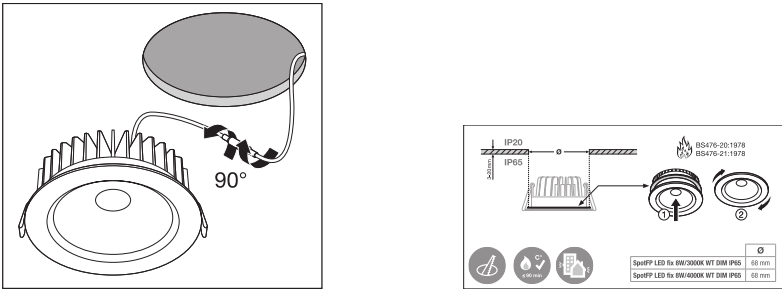

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.