

# PRODUCT DATASHEET

## LN INDV D DALI 1500 25 W 3000 K

LINEAR IndiviLED® DIRECT DALI GEN 1 | Surface mounted luminaire for single luminaire or light line application with DALI-2 IoT technology



### Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, schools
- General indoor illumination
- Corridors, entrance areas
- Seamless linear lighting
- Shop lighting

PERFORMANCE  
CLASS

### Product benefits

- Suitable luminaire for VIVARES and other DALI-2 Light Management Systems
- Homogenous light distribution and reduced glare thanks to the IndiviLED® optics
- Multiple mounting options
- The product family offers full lighting solution for different applications
- Energy savings of up to 50 % compared to T5 batten luminaires
- Further variants additionally available with DALI ECG, emergency lighting function according to IEC 60598-2-22 or through wiring
- Robust structure with IK06
- Low flicker light thanks to special electronic control gear
- 5 years guarantee

### Product features



- IoT-ready luminaire with DALI-2 technology
- Each LED with individual lens and reflector for UGR < 16 and homogenous light distribution
- Pendant mounting with suspension kit
- Linkable into seamless light line with line connection adapter (surface or pendant mounting)
- Available with length of 1200 or 1500 mm
- Luminous flux up to 5700 lm
- Luminous efficacy: up to 125 lm/W
- Initial color consistency: 3 SDCM
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- Versions available with CRI 90
- Lifetime (L70/B50): 60,000 h (at 25 °C)


## TECHNICAL DATA

### Electrical data


|                                                             |                       |
|-------------------------------------------------------------|-----------------------|
| Nominal wattage                                             | 25.00 W               |
| Nominal voltage                                             | 220...240 V           |
| Mains frequency                                             | 0/50/60 Hz            |
| Nominal current                                             | 140 mA                |
| Inrush current                                              | 20 A                  |
| Inrush current time $T_{h50}$                               | 300 $\mu$ s           |
| Max. number of luminaires per miniature circuit breaker B16 | 11                    |
| Max. number of luminaires per miniature circuit breaker C10 | 11                    |
| Max. number of luminaires per miniature circuit breaker C16 | 18                    |
| Power factor $\lambda$                                      | > 0.90                |
| Total harmonic distortion                                   | $\leq$ 18 %           |
| Protection class                                            | I                     |
| Operating mode                                              | Integrated LED driver |
| Dimming interface                                           | DALI-2                |

### Photometrical data

|                                              |                    |
|----------------------------------------------|--------------------|
| Luminous flux                                | 3100 lm            |
| Luminous efficacy                            | 125 lm/W           |
| Color temperature                            | 3000 K             |
| Light color (designation)                    | Warm White         |
| Color rendering index Ra                     | $\geq$ 80          |
| Standard deviation of color matching         | 3 sdc <sub>m</sub> |
| Luminous intensity                           | -                  |
| Low flicker                                  | Yes                |
| Flickering metric (Pst LM)                   | -                  |
| Stroboscope effect metric (SVM)              | -                  |
| Photobiological safety group acc. to EN62778 | RG1                |
| Photobiological safety group acc. to EN62471 | RG0                |
| Beam angle                                   | 70 °               |
| UGR                                          | < 16               |

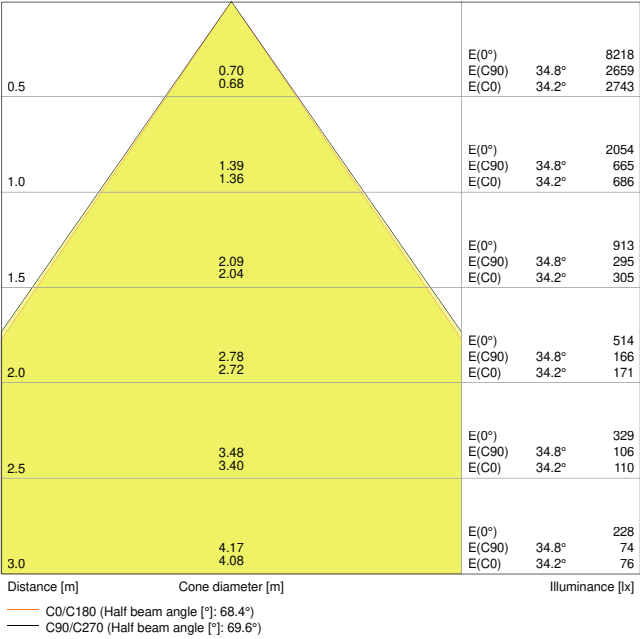

LN INDV D DALI 1500 25W 3000K

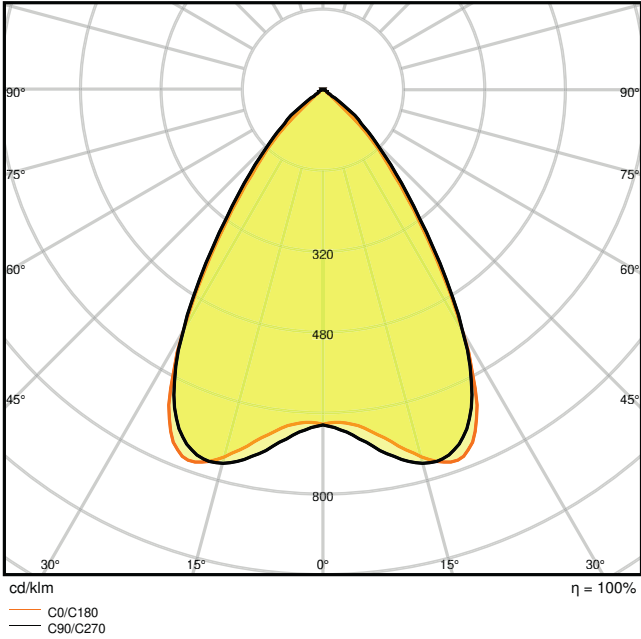

LN INDV D DALI 1500 25W 3000K

Dimensions & Weight

|                |            |
|----------------|------------|
| Length         | 1488.00 mm |
| Width          | 120.00 mm  |
| Height         | 40.00 mm   |
| Product weight | 3000.00 g  |



Materials & Colors

|                          |          |
|--------------------------|----------|
| Product color            | White    |
| Housing color            | White    |
| RAL Color (most similar) | RAL 9003 |
| Body material            | Aluminum |
| Cover material           | Aluminum |

|                                            |                    |
|--------------------------------------------|--------------------|
| Light emitting surface material            | Polycarbonate (PC) |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C             |
| Mercury content                            | 0.0 mg             |

### Application & Mounting

|                                        |                            |
|----------------------------------------|----------------------------|
| Ambient temperature range              | -20...+45 °C               |
| Type of connection                     | Screwless terminal, 5-Pole |
| Type of protection                     | IP20                       |
| Protection class IK (shock resistance) | IK06                       |
| Dimmable                               | Yes                        |
| Type of dimming                        | DALI                       |
| Mounting type                          | Suspended/Surface          |
| Mounting location                      | Ceiling                    |
| Application environment                | Indoor                     |
| With light source                      | Yes                        |
| Replaceable light source               | No                         |

### Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 60000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 50000 h <sup>1)</sup> |
| Lifespan L80/B50 at 25 °C  | 50000 h               |
| Lifespan L90/B10 at 25 °C  | 35000 h               |
| Number of switching cycles | 100000                |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Certificates & Standards

|                                                      |                         |
|------------------------------------------------------|-------------------------|
| Standards                                            | CE / CB / TÜV SÜD / EAC |
| Luminaire with limited surface temperature, "D sign" | No                      |
| Ball shot safe                                       | No                      |
| Replaceable light source (EPREL)                     | Not replaceable         |

### EQUIPMENT / ACCESSORIES

- Ceiling connection box available
- Suspension kit available
- Line connection adapter available
- Through-wiring cable kit available

## DOWNLOAD DATA


| Documents and certificates                                                         |                                        | Document name                                               |
|------------------------------------------------------------------------------------|----------------------------------------|-------------------------------------------------------------|
|    | User instruction / safety instructions | User Instruction Linear IndiviLED DALI                      |
|    | Legal information                      | LS Insert LN INDV DALI EM                                   |
|    | Legal information                      | Legal Insert LN INDV D DALI                                 |
|    | Legal information                      | Informationstext 18 Abs 4 ElektroG                          |
|    | Declarations of conformity             | EU Declaration of Conformity Linear IndiviLED DALI LEDVANCE |
| Photometric and lighting design files                                              |                                        | Document name                                               |
|    | IES file (IES)                         | LN INDV D DALI 1500 25W 3000K                               |
|    | LDT file (Eulumdat)                    | LN INDV D DALI 1500 25W 3000K                               |
|  | ULD file (DIALux)                      | LINEARIndiviLEDDIRECTDALI150025W3000K                       |
|  | ROLF file (RELUX)                      | LN INDV D DALI 1500                                         |
|  | UGR file (UGR table)                   | LN INDV D DALI 1500 25W 3000K                               |
|  | Light distribution curve type cone     | LN INDV D DALI 1500 25W 3000K                               |
|  | Light distribution curve type polar    | LN INDV D DALI 1500 25W 3000K                               |
| CAD/BIM files                                                                      |                                        | Document name                                               |
|  | BIM Revit 3D                           | Linear IndiviLED G1                                         |
|  | CAD STEP 3D                            | LN INDV 1500                                                |
| Tender texts                                                                       |                                        | Document name                                               |
|  | Tender documents                       | LINEAR IndiviLED DIRECT DALI DALI 1500 25 W 3000 K-EN       |

## LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume    |
|---------------|------------------------------|--------------------------------------|--------------|-----------|
| 4058075108929 | Folding box<br>1             | 132 mm x 1,624 mm x 52 mm            | 3242.00 g    | 11.15 dm³ |
| 4058075108936 | Shipping box<br>4            | 1,641 mm x 207 mm x 169 mm           | 14498.00 g   | 57.41 dm³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.