


HIGHBAY LINEAR



LEDVANCE

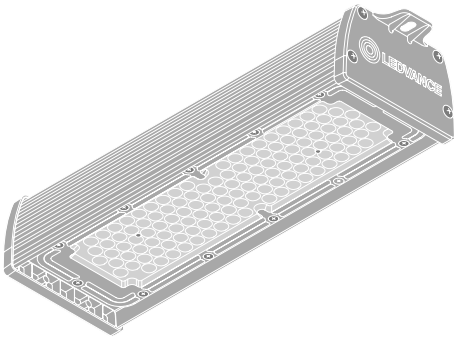

HIGHBAY LINEAR



	EAN	l x w x h [mm]	W	VAC	Hz	Im	Im/W	K
HB LINEAR V 95W ML 20x85 840 BK	4099854878930	382x112x71	95*	220-240	50/60	**	160	4000
HB LINEAR V 145W ML 20x85 840 BK	4099854878923	707x112x71	145*	220-240	50/60	**	160	4000
HB LINEAR V 195W ML 20x85 840 BK	4099854878961	707x112x71	195*	220-240	50/60	**	160	4000
HB LINEAR V 95W ML 90 840 BK	4099854878947	382x112x71	95*	220-240	50/60	**	170	4000
HB LINEAR V 145W ML 90 840 BK	4099854879029	707x112x71	145*	220-240	50/60	**	170	4000
HB LINEAR V 195W ML 90 840 BK	4099854879036	707x112x71	195*	220-240	50/60	**	170	4000
HBLINEAR DA V 95W ML20x85 840 BK	4099854878954	382x112x71	95*	220-240	50/60	**	160	4000
HBLINEAR DA V 145W ML20x85 840BK	4099854879043	707x112x71	145*	220-240	50/60	**	160	4000
HBLINEAR DA V 195W ML20x85 840BK	4099854879050	707x112x71	195*	220-240	50/60	**	160	4000
HB LINEAR DA V 95W ML 90 840 BK	4099854879197	382x112x71	95*	220-240	50/60	**	170	4000
HB LINEAR DA V 145W ML 90 840 BK	4099854879067	707x112x71	145*	220-240	50/60	**	170	4000
HB LINEAR DA V 195W ML 90 840 BK	4099854879074	707x112x71	195*	220-240	50/60	**	170	4000
HB LINEAR V 95W ML 20x85 865 BK	4099854879203	382x112x71	95*	220-240	50/60	**	160	6500
HB LINEAR V 145W ML 20x85 865 BK	4099854879098	707x112x71	145*	220-240	50/60	**	160	6500
HB LINEAR V 195W ML 20x85 865 BK	4099854879104	707x112x71	195*	220-240	50/60	**	160	6500
HB LINEAR V 95W ML 90 865 BK	4099854879210	382x112x71	95*	220-240	50/60	**	170	6500
HB LINEAR V 145W ML 90 865 BK	4099854879135	707x112x71	145*	220-240	50/60	**	170	6500
HB LINEAR V 195W ML 90 865 BK	4099854879142	707x112x71	195*	220-240	50/60	**	170	6500
HBLINEAR DA V 95W ML20x85 865 BK	4099854879227	382x112x71	95*	220-240	50/60	**	160	6500
HBLINEAR DA V 145W ML20x85 865BK	4099854879159	707x112x71	145*	220-240	50/60	**	160	6500
HBLINEAR DA V 195W ML20x85 865BK	4099854879166	707x112x71	195*	220-240	50/60	**	160	6500
HB LINEAR DA V 95W ML 90 865 BK	4099854879234	382x112x71	95*	220-240	50/60	**	170	6500
HB LINEAR DA V 145W ML 90 865 BK	4099854879173	707x112x71	145*	220-240	50/60	**	170	6500
HB LINEAR DA V 195W ML 90 865 BK	4099854879180	707x112x71	195*	220-240	50/60	**	170	6500
HB LINEAR V 60W ML 20x85 840 BK	4099854879241	382x112x71	60*	220-240	50/60	**	160	4000
HB LINEAR V 60W ML 90 840 BK	4099854879258	382x112x71	60*	220-240	50/60	**	170	4000
HB LINEAR V 60W ML 20x85 865 BK	4099854879265	382x112x71	60*	220-240	50/60	**	160	6500
HB LINEAR V 60W ML 90 865 BK	4099854879272	382x112x71	60*	220-240	50/60	**	170	6500
HBLINEAR DA V 60W ML20x85 840 BK	4099854879289	382x112x71	60*	220-240	50/60	**	160	4000
HB LINEAR DA V 60W ML 90 840 BK	4099854879296	382x112x71	60*	220-240	50/60	**	170	4000
HBLINEAR DA V 60W ML20x85 865 BK	4099854879302	382x112x71	60*	220-240	50/60	**	160	6500
HB LINEAR DA V 60W ML 90 865 BK	4099854879319	382x112x71	60*	220-240	50/60	**	170	6500


	20°x85°
--	---------

*W _{AC}	195	175	165	145	125	110	95	80	70	60	50	40
**Im	31200	28000	26400	23200	20000	17600	15200	12800	11200	9600	8000	6400

	90°
--	-----






*W _{AC}	195	175	165	145	125	110	95	80	70	60	50	40
**Im	33150	29750	28050	24650	21250	18700	16150	13600	11900	10200	8500	6800


HIGHBAY LINEAR



	EAN	IP	IK		Ra	°(°C)	PF		
HB LINEAR V 95W ML 20x85 840 BK	4099854878930	65	08	20°x85°	>80	-25°...+45°	>0.9	-	1.8kg
HB LINEAR V 145W ML 20x85 840 BK	4099854878923	65	08	20°x85°	>80	-25°...+45°	>0.9	-	2.3kg
HB LINEAR V 195W ML 20x85 840 BK	4099854878961	65	08	20°x85°	>80	-25°...+45°	>0.9	-	2.5kg
HB LINEAR V 95W ML 90 840 BK	4099854878947	65	08	90°	>80	-25°...+45°	>0.9	-	1.8kg
HB LINEAR V 145W ML 90 840 BK	4099854879029	65	08	90°	>80	-25°...+45°	>0.9	-	2.3kg
HB LINEAR V 195W ML 90 840 BK	4099854879036	65	08	90°	>80	-25°...+45°	>0.9	-	2.5kg
HBLINEAR DA V 95W ML20x85 840 BK	4099854878954	65	08	20°x85°	>80	-25°...+45°	>0.9	DALI 2.0	1.8kg
HBLINEAR DA V 145W ML20x85 840BK	4099854879043	65	08	20°x85°	>80	-25°...+45°	>0.9	DALI 2.0	2.3kg
HBLINEAR DA V 195W ML20x85 840BK	4099854879050	65	08	20°x85°	>80	-25°...+45°	>0.9	DALI 2.0	2.5kg
HB LINEAR DA V 95W ML 90 840 BK	4099854879197	65	08	90°	>80	-25°...+45°	>0.9	DALI 2.0	1.8kg
HB LINEAR DA V 145W ML 90 840 BK	4099854879067	65	08	90°	>80	-25°...+45°	>0.9	DALI 2.0	2.3kg
HB LINEAR DA V 195W ML 90 840 BK	4099854879074	65	08	90°	>80	-25°...+45°	>0.9	DALI 2.0	2.5kg
HB LINEAR V 95W ML 20x85 865 BK	4099854879203	65	08	20°x85°	>80	-25°...+45°	>0.9	-	1.8kg
HB LINEAR V 145W ML 20x85 865 BK	4099854879098	65	08	20°x85°	>80	-25°...+45°	>0.9	-	2.3kg
HB LINEAR V 195W ML 20x85 865 BK	4099854879104	65	08	20°x85°	>80	-25°...+45°	>0.9	-	2.5kg
HB LINEAR V 95W ML 90 865 BK	4099854879210	65	08	90°	>80	-25°...+45°	>0.9	-	1.8kg
HB LINEAR V 145W ML 90 865 BK	4099854879135	65	08	90°	>80	-25°...+45°	>0.9	-	2.3kg
HB LINEAR V 195W ML 90 865 BK	4099854879142	65	08	90°	>80	-25°...+45°	>0.9	-	2.5kg
HBLINEAR DA V 95W ML20x85 865 BK	4099854879227	65	08	20°x85°	>80	-25°...+45°	>0.9	DALI 2.0	1.8kg
HBLINEAR DA V 145W ML20x85 865BK	4099854879159	65	08	20°x85°	>80	-25°...+45°	>0.9	DALI 2.0	2.3kg
HBLINEAR DA V 195W ML20x85 865BK	4099854879166	65	08	20°x85°	>80	-25°...+45°	>0.9	DALI 2.0	2.5kg
HB LINEAR DA V 95W ML 90 865 BK	4099854879234	65	08	90°	>80	-25°...+45°	>0.9	DALI 2.0	1.8kg
HB LINEAR DA V 145W ML 90 865 BK	4099854879173	65	08	90°	>80	-25°...+45°	>0.9	DALI 2.0	2.3kg
HB LINEAR DA V 195W ML 90 865 BK	4099854879180	65	08	90°	>80	-25°...+45°	>0.9	DALI 2.0	2.5kg
HB LINEAR V 60W ML 20x85 840 BK	4099854879241	65	08	20°x85°	>80	-25°...+45°	>0.9	-	1.6kg
HB LINEAR V 60W ML 90 840 BK	4099854879258	65	08	90°	>80	-25°...+45°	>0.9	-	1.6kg
HB LINEAR V 60W ML 20x85 865 BK	4099854879265	65	08	20°x85°	>80	-25°...+45°	>0.9	-	1.6kg
HB LINEAR V 60W ML 90 865 BK	4099854879272	65	08	90°	>80	-25°...+45°	>0.9	-	1.6kg
HBLINEAR DA V 60W ML20x85 840 BK	4099854879289	65	08	20°x85°	>80	-25°...+45°	>0.9	DALI 2.0	1.6kg
HB LINEAR DA V 60W ML 90 840 BK	4099854879296	65	08	90°	>80	-25°...+45°	>0.9	DALI 2.0	1.6kg
HBLINEAR DA V 60W ML20x85 865 BK	4099854879302	65	08	20°x85°	>80	-25°...+45°	>0.9	DALI 2.0	1.6kg
HB LINEAR DA V 60W ML 90 865 BK	4099854879319	65	08	90°	>80	-25°...+45°	>0.9	DALI 2.0	1.6kg


HIGHBAY LINEAR

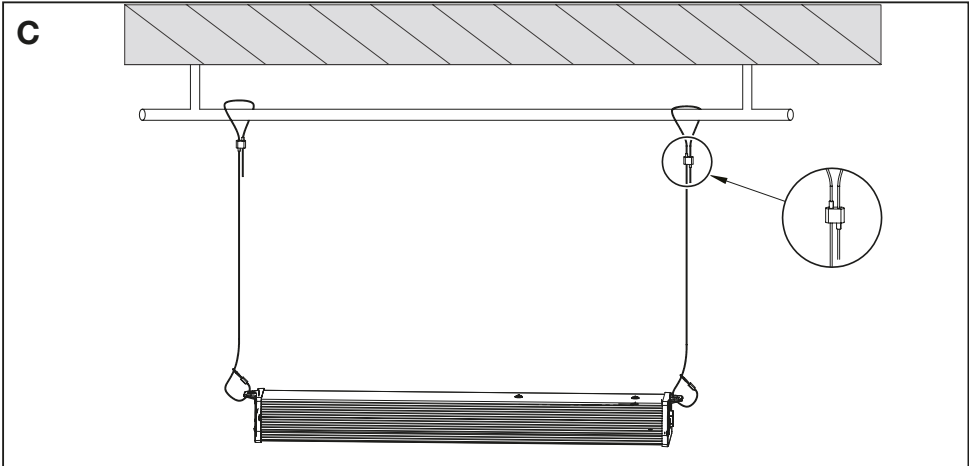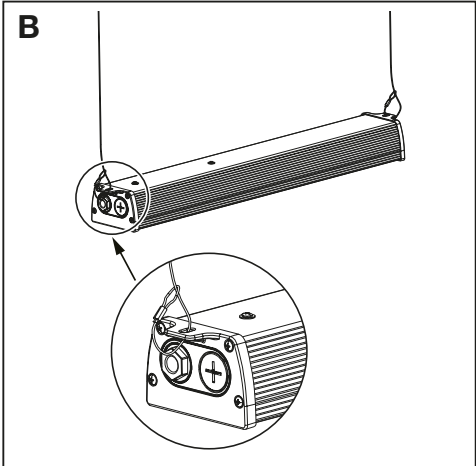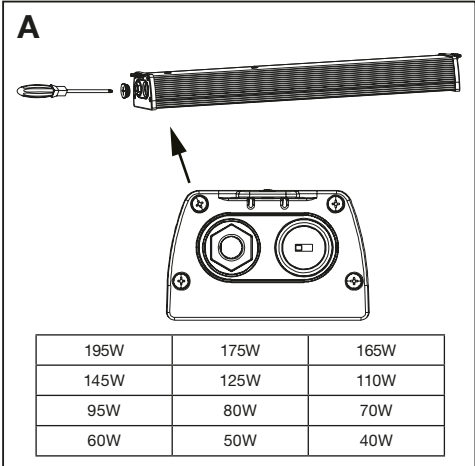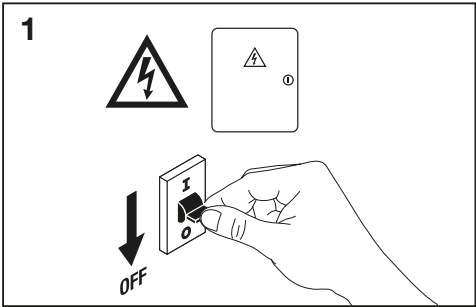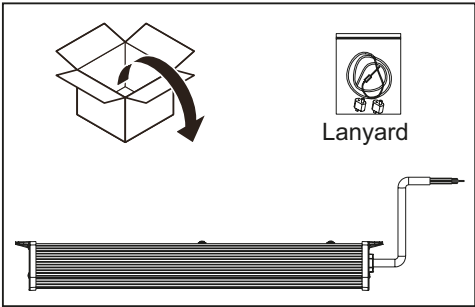




M6

2

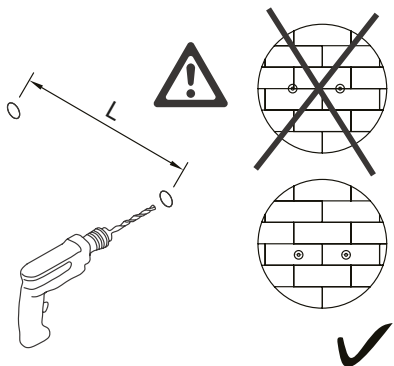


W	195W	145W	95W	60W
L [mm]	689	689	364	364

3

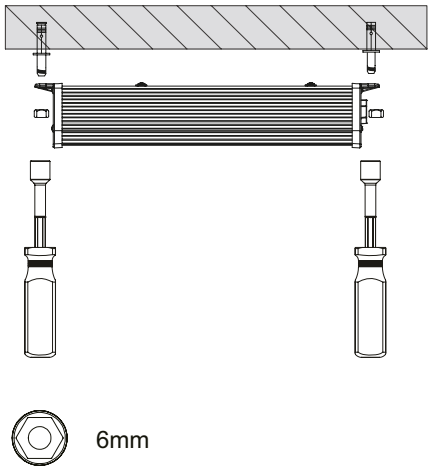


6mm

4

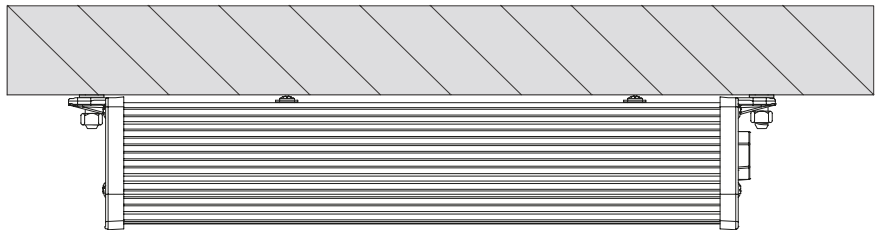





5

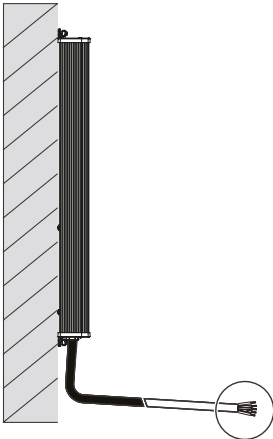



ON/OFF

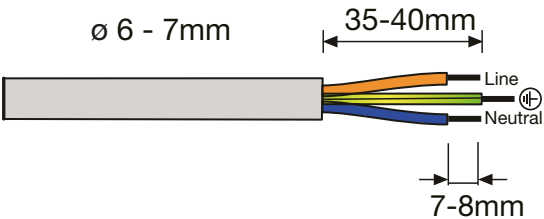




DALI 2.0:

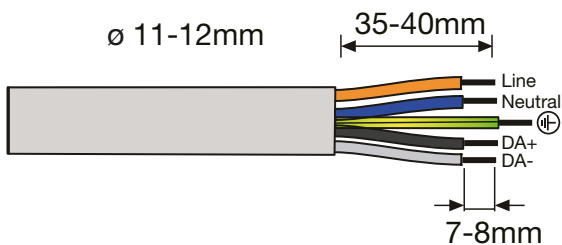



6

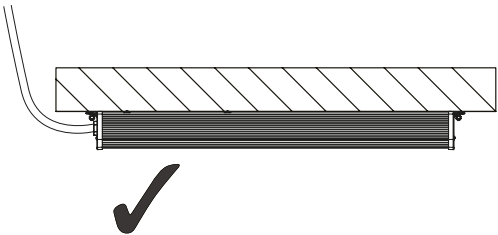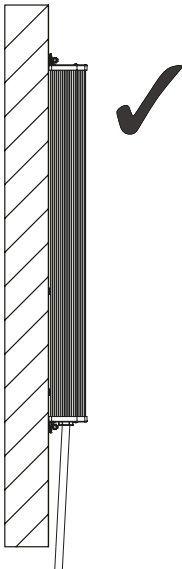

7

ON
↑

n	B16A 	C10A 	C16A 
60W	9	7	12
95W	9	7	11
145W	5	3	6
195W	5	4	7



LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com



FR
Cet appareil et
ses accessoires
se recyclent



Points de collecte sur www.quefairedemesdechets.fr

C10449057
G11281377
22.04.26

GB LEDVANCE Ltd, Sterling House,
810 Mandarin Court, Warrington,
Cheshire, WA1 1GG, United Kingdom